

TECHNICAL DATA SHEET

RILSAN® BZM 8 O T3L

POLYAMIDE 11 PELLET

RILSAN® BZM 8 O T3L is a polyamide 11 compound. It is produced from a renewable & sustainable source (castor oil). This natural glass fiber reinforced grade is designed for injection molding. It has a superior color stability, which makes particularly adapted to consumer applications.

Designation : ISO 16396 - PA11, GF8, M1G1HLR, C18-030

TYPE

PA11-GF8

MAIN APPLICATIONS

- Footwear - Outsole/Components
- Outdoor - Equipment - Growth
- Outdoor - Equipment/Bicycle/Racket
- Other Sport Equipment
- Industry - Distribution
- Auto - Fluid Connectors

DELIVERY FORM

- Pellets

TRANSFORMATION PROCESSES

- Injection Molding

ADDITIVES

- Heat Stabilized
- Light Stabilized

RHEOLOGICAL PROPERTIES

特性	价值	UNIT	测试标准
Shrinkage, Parallel (t+24h)	1.1	%	ISO 294-4
Shrinkage, Normal (t+24h)	0.8	%	ISO 294-4
Melt volume flow rate (MVR), 235°C / 5 kg (455°F / 11 lb)	15	cm³/10min	ISO 1133

MECHANICAL PROPERTIES

特性	DRY / COND VALUE*	UNIT	测试标准
Flexural modulus, 23°C (73°F)	- / 1850	MPa	ISO 178
Tensile modulus, 23°C (73°F), 1 mm/min	2200 / 2200	MPa	ISO 527-1/-2
Nominal strain at break, 23°C (73°F), 50 mm/min	/ 26	%	ISO 527-1/-2
Stress at break, 23°C (73°F), 50 mm/min	/ 56	MPa	ISO 527-1/-2
Charpy notched impact strength, 23°C (73°F)	- / 12	kJ/m²	ISO 179 1eA
Charpy notched impact strength, -30°C (-22°F)	- / 7.8	kJ/m²	ISO 179 1eA
Charpy unnotched impact strength, 23°C (73°F)	- / No break		ISO 179 1eU
Charpy unnotched impact strength, -30°C (-22°F)	- / No break		ISO 179 1eU
Hardness, Shore D, 15 s	- / 73		ISO 868

*DRY: Dry As Molded (DAM) if pellet / Dry if powder.
COND: Conditionned.

RILSAN® BZM 8 O T3L

THERMAL PROPERTIES

特性	价值	UNIT	测试标准
Melting temperature, 10°C/min	189	°C	ISO 11357-1/-3
Yellow card available	YES		
, minimum thickness 0.8 mm	HB		IEC 60695-11-10
, minimum thickness 1.5 mm	HB		IEC 60695-11-10
	HB		IEC 60695-11-10

OTHER PROPERTIES

特性	价值	UNIT	测试标准
Specific gravity, 23°C (73°F)	1.08	g/cm³	ISO 1183-1
Bio-based carbon content, Measured	100	%	

包装

Available packaging:

- 25 公斤 / 55 磅 袋

保质期

Two years from the date of delivery, when stored properly (sealed bags, appropriate moisture, UV protection and temperature). For any use above this limit, please refer to our technical services.


PROCESSING CONDITIONS:

- 典型熔融温度 (最小/推荐/最大) ——注塑成型: 250°C / 270°C / 290°C (480°F / 520°F / 555°F)
- 典型模具温度——注塑成型: 40-90°C (105-195°F)
- Drying time and temperature: 80-90°C (175-195°F) / 4-6 hours

SPECIAL CHARACTERISTICS

- Bio-based
- Low oligomers

DIAGRAMS

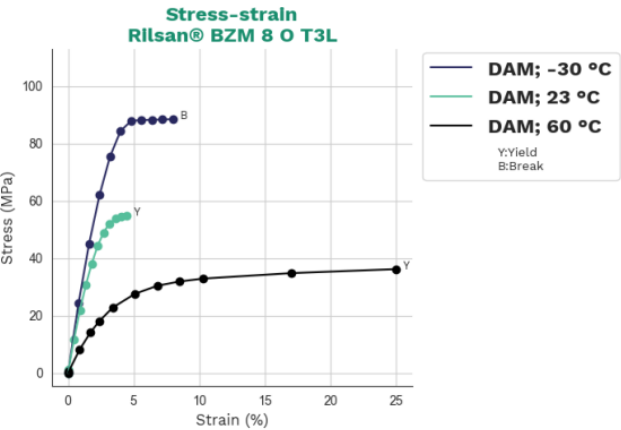

RILSAN® BZM 8 O T3L

阿科玛 (中国) 投资有限公司
北京市朝阳区
太阳宫中路12号楼9层904室
邮政编码 : 100028
+86 (10) 8415 8360

Headquarter: Arkema France
51, Esplanade du Général de Gaulle
92800 Puteaux – France
T +33 (0)1 49 00 80 80

Disclaimer - Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/global/en/products/product-safety/disclaimer/> which is incorporated herein by reference and made a part hereof.
Arkema France, a French société anonyme registered at the Trade and Companies Register of Nanterre under the number 319 632 790

arkema.com

